


CEMENT COATED LOW-BOARD

Product Datasheet

The routed overlay panels are manufactured from high density XPS which is thermally insulating, lightweight, waterproof and faced with a reinforced cement coating.

The panels are manufactured for use with 12mm pipe and centres at 150mm. The panels must be laid onto a flat and level subfloor, which can either be concrete or timber based. Over a concrete floor we recommend laying the panels over a combed layer of flexible tiling adhesive. For timber floors we recommend securing with screws and washers.

Tiles and wood flooring can be laid directly over this system. Other finishes such as carpets or vinyl will require a gmm board layer, prior to the finish layer.

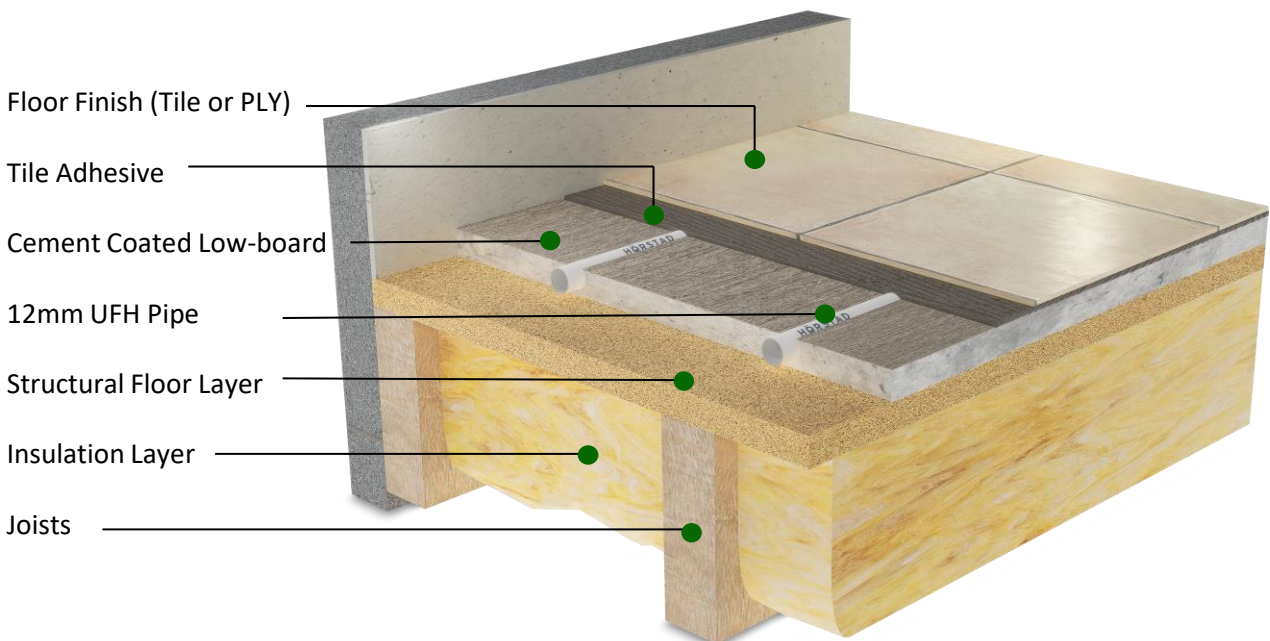

Panel Size	Thickness	Weight	Centres	Pipe	Thermal Conductivity Value
1200mm x 600mm	18mm	2.5kg	150mm	12mm	0.033W/mK