
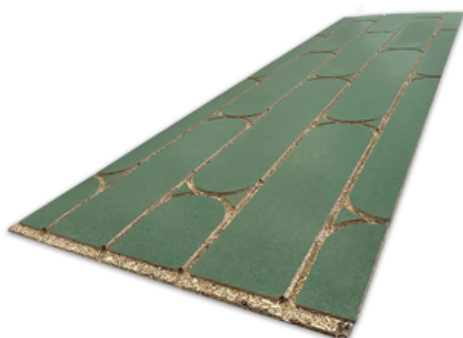


CHIPBOARD PANEL SYSTEM

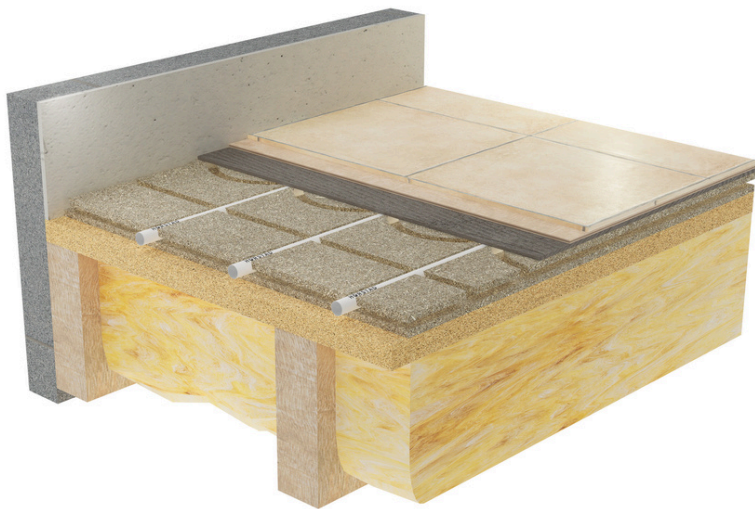

Moisture resistant, routed chipboard available standard or foiled. Highly conductive which allows for an even spread of heat throughout the floor. system should be completed with an overlay board or suitable plywood.

Structural Standard: The board size is 2400mm x 600mm x 22mm, being grooved on one face as required to suit 12mm underfloor heating pipe with radius returns as standard.

Typically installed directly onto floor joists (usually insulated in between), utilizing standard chipboard screws and joint adhesive. An overlay board or suitable plywood should be applied prior to the application of any floor finishes.

Suitable for new build or retrofit installations. Installed directly onto floor joists allow for a lower floor build up.

Structural Foiled: For extra thermal performance we offer a foil faced option for 12mm pipe.

Non-Structural: We also stock a non-structural chipboard panel. Board Size 1800mm x 605mm x 22mm for 16mm pipe, 150mm pipe spacings.

Product Codes:

**HOR/CFTB/2400-600-22/150C/12:
2400MM X 600MM X 22MM STRUCTURAL FOIL
TOPPED CHIPBOARD FOR 12MM PIPE, 150MM PIPE
SPACINGS**

**HOR/CHPB/2400-600-22/150C/12:
2400MM X 600MM X 22MM STRUCTURAL CHIPBOARD
FOR 12MM PIPE, 150MM PIPE SPACINGS**

**HOR/CPB/1800-605-22/150C/16:
1800MM X 605MM X 22MM NON STRUCTURAL
CHIPBOARD WITH RETURNS FOR 16MM PIPE, 150MM
PIPE SPACINGS**