



# PREMIUM CASTELLATED PANELS



The castellated low profile underfloor heating system is designed for refurbishment projects where floor build up is at a premium. The system incorporates either a 12mm or a 16mm underfloor heating pipe within a plastic castellated panel, which is then covered with 20mm reinforced levelling compound.

This system is suitable for all types of concrete & timber floors.

Most floor finishes can be laid directly on top of this system.

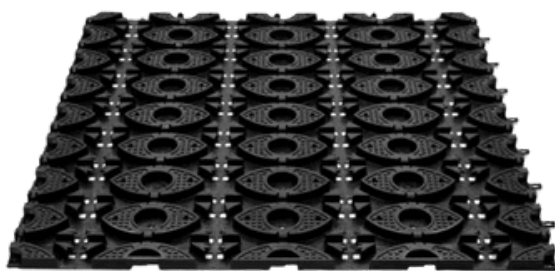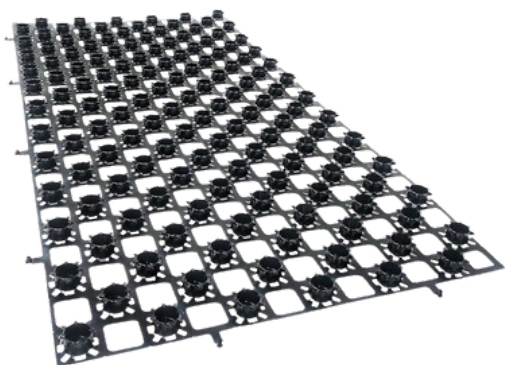

## Product Codes:

**HOR/PREMCAS/600-600/12:  
PREMIUM CASTELLATED PANEL FOR  
12MM PIPE**

**HOR/PREMCAS/1200-600/16:  
PREMIUM CASTELLATED PANEL FOR  
16MM PIPE**

SEE NEXT PAGE FOR TECHNICAL INFORMATION

**HÖRSTAD**




WWW.HORSTAD.COM

# CASTELLATED LOW PROFILE SYSTEM

## PREMIUM CASTELLATED PANEL FOR 12MM PIPE

Technical Information:

- Thickness: 15mm
- Panel Size: 600 x 600mm
- Channel (to suite UFH pipe diameter: 10, 12mm)
- Pipe centre options: 150, 300mm
- Composition: 100% recycled polypropylene

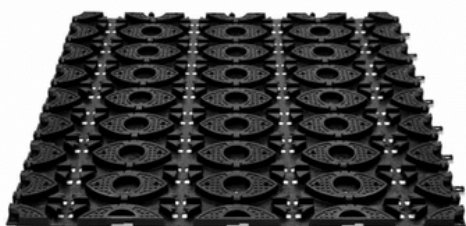

## PREMIUM CASTELLATED PANEL FOR 16MM PIPE

Technical Information:

- Thickness: 20mm
- Panel Size: 600 x 1200mm
- Channel (to suite UFH pipe diameter: 14, 15, 16, 17mm)
- Pipe centre options: 150, 200, 300mm
- Composition: 100% recycled polypropylene

